Rouge Lighting PLUS

CATALOG #

PROJECT NAME

TYPE

EX151X-GRAY, EX152X-GRAY
EX251X-GRAY, EX252X-GRAY

Hazardous locationExit Sign

STANDARD

OPTIONAL

ILLUMINATION

- *Ultra bright, energy efficient, long life Red or Green LEDs.*

ELECTRICAL

- *Dual 120/277 voltage.*
- *Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).*
- *Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.*
- *4.8V long-life, maintenance-free, rechargeable NiCd battery (EM models only).*
- *Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.*
- *Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.*

MOUNTING

- *Universal knockout pattern on back provided with gasket for watertight seal for back mount.*
- *Polycarbonate mounting canopy included for top or end mount.*

HOUSING

- *Housing is fiberglass reinforced polycarbonate construction in gray finish.*
- *Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.*
- *Knockout's provided for conduit feed applications.*
- *EZ snap-out Chevron directional indicators.*

OPTIONS

- *SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.*
- *2C-120V/2C-277V: Voltage-specific dual circuit option on the AC-only unit enables it to be connected to two different supplies at the same time.*
- *TP: Tamper-proof hardware helps discourage unauthorized access to the unit.*

WARRANTY / LISTING

- *Five year warranty on all electronics and housing. Batteries prorated for five years.*
- *Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.*
- *IP66 rated for Ingress protection.*
- *Rated for Class 1, Division 2, Groups A,B,C, & D.*
- *Certified to CEC under Title 20 Regulations.*
- *UL listed for wet locations (-20°C – 50°C).*

DIMENSIONS

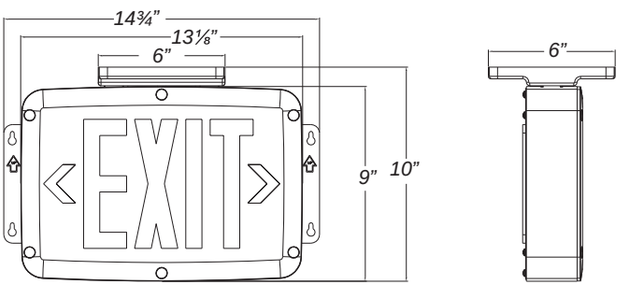

Sample Part Number: **EX252G-GRAY-SDT**

MODEL	No. of FACES		BATTERY		LETTER COLOR		HOUSING COLOR		OPTIONS	
EX	15	Single	1	AC-Only	R	Red	G	Gray	SDT	Self-Diagnostics[1]
	25	Double	2	NiCd Battery	G	Green			2C-120	Dual Circuit With 120V Input[2]
									2C-277	Dual Circuit With 277V Input[2]
									TP	Tamper-Proof

[1] Available only with EM units.
[2] Available only with AC units.

ELRAM, INC • **TF: 855-415-5550 • T: 323-46-ELRAM** (35726) • **elramusa.com • info@elramusa.com**

© 2020 ELRAM, Inc. Elram, Inc. holds the right to change the design of our products at any time.