

SQ8LEDICA LED 8 inch square Recessed Down light

LED 8 inch Square Housing



PRODUCT DESCRIPTION


Rouge Lighting SQ8LEDICA is a 8" square IC Rated housing at 120-277V. Thermally protected, high efficiency driver standard Wet Locations listed (Not suitable for coastal / salt water area) cUL listed / ENERGY STAR certified. RoHS compliances. Tested in accordance with IESNA LM79 & LM80. 5 year warranty

PERFORMANCE DATA

Input Voltage	120-277V
Input Power	19W
Frequency	50 / 60Hz
T Ambient	-30°C -40°C (-22°F -104°F)
CRI	≥90
CCT	3000 K
Lumens	1350 lm

(all values at 25°C without a dimming control in circuit)

FRAME


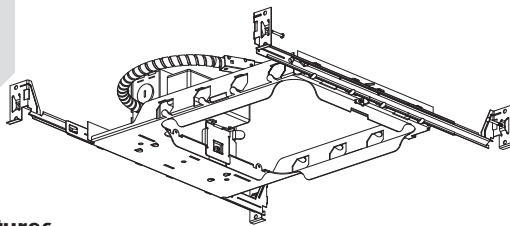


Features


- Galvanized steel construction plaster frame-in with J-Box and captive hanger bar with real nail.
- Available at 120-277V (0-10V dimming)
- LED Driver is mounted directly on the frame.

Dimensions

SQ8LEDICA 8" Square Frame



TRIM

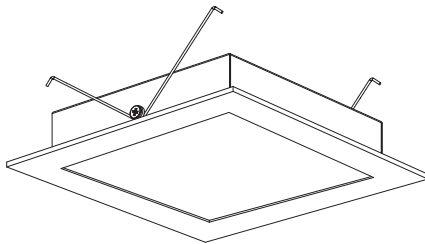


Features

- Aluminum body dissipates heat from the LED board.
- Square ring is made of plastic.
- Easy installation with torsion spring.

Dimensions

SQ8F930-WH

8" Square Flush Lens Trim

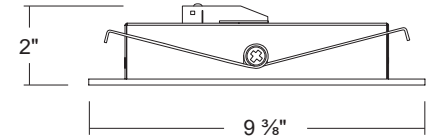

LIST OF COMPATIBLE DIMMERS

120-277V (0-10V Dimmer Switch)		
Mfr	Model #	Dimming Rate
Lutron	NFTV	0 - 100%
Lutron	NTSTV-DV	0 - 100%
Legrand	CD4FBLW	0 - 100%
Leviton	1P710-DL	0 - 100%

ORDERING INFORMATION

Model NO.	Description
SQ8LEDICA	8" LED Square frame / Driver with Flex. Conduit connected to J-Box directly / 2 power wires / No deicast connector / 120-277V / 0-10V Dimming
SQ8F930-WH	8" LED Square Trim / Flush Lens / Torsion Spring

ORDERING INFORMATION

LUMINAIRE	LENGTH	OPTICS	WATTAGE	CONTROL OPTOINS	VOLTAGE	SELECTION	TRIM OPTIONS
SQ - ⊙ Recessed Housing	8 - 8" Square	LED - LED Ideal male orange quick connector	blank - 19W	blank - 0-10V Dimming	blank - 120-277V	ICA - IC Air-tight	SQ8F930-WH 8" LED Square Trim / Flush Lens / Torsion Spring