

- 
- 
- 
- 
- 
- 
- 
- 

## R4G95CT-XX

### 4" LED 5CCT Gimbal Retrofit Kit



#### PRODUCT SPECIFICATIONS

- Conduit quick-connect connector facilitate installation.
- Use select 5 Kinds of CCT with a switch on the driver.
- Diecast aluminum trim routes heat away from electrical components.
- 3 Tension clips pre-installed on unit for easy installation.
- E26 medium screw-base Edison connector provides easy retrofit of incandescent housings- Sold separately.
- (GU10 and GU24 socket adapter available - sold separately)

#### LED LIGHT ENGINE

- Protected LED driver performs at 120V
- Dimming down to 5% with most dimmers (at 120V only). CCT
- 2700K, 3000K, 3500K, 4000K, 5000K available
- CRI ≥90
- Long life LED chips guaranteed up to 50,000 hours.

#### WARRANTY

Guaranteed three years from the purchase date of the product, against mechanical defects in manufacturing.


#### LISTINGS

- cULus classified
- Energy star qualified
- Title 24 compliant
- Wet locations (Not suitable for coastal/salt water area)
- Damp locations
- RoHS compliances
- Tested in accordance with IESNA LM79 & LM80

#### PRODUCT DESCRIPTION

Rouge Lighting **R4G95CT** is 4 inch Gimbal LED Retrofit Kit. This LED retrofit is CCT adjustable. It is compatible with most of 4 inch standard recessed new construction and remodel housings. The Retrofit Kit comes with a E26 medium screw-base Edison adapter for easy installation into standard incandescent sockets.

#### DIMENSIONS

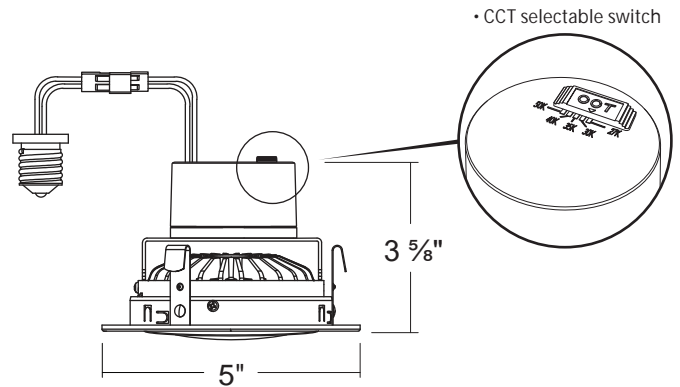

#### List of Triac Dimmer Switch

Mfr	Model #	Dimming Rate
COOPER	DLC03P	10 - 100%
Leviton	1A1505 / 1C1605	10 - 100%
Leviton	6631 / 6633	10 - 100%
Lutron	CT-603PG / CT-600PR	10 - 100%
Lutron	DV-600PR / DV603PG	10 - 100%
Lutron	DVW-603PGH / DVCL-153P	10 - 100%
Lutron	MACL-153M / TGCL-153P	10 - 100%
Lutron	S-600PR / S-2-LH	10 - 100%

#### PERFORMANCE DATA

Input Voltage	120V				
Input Power	8W				
Frequency	50 / 60Hz				
CRI	90				
T Ambient	-30 °C ~40 °C (-22 °F ~104 °F)				
CCT	2700 K	3000 K	3500 K	4000 K	5000 K
Lumens	640 lm	660 lm	670 lm	690 lm	700 lm

(all values at 25°C without a dimming control in circuit)

#### ORDERING INFORMATION

LUMINAIRE	LENGTH	OPTICS	WATTAGE	CONTROL	VOLTAGE	CRI	COLOR	FINISH	INSTALL	OPTIONS
R - Round Shape	4G - 4" Gimbal	blank - (111.9°)	blank - (8 watt)	blank - TRIAC Dimming	blank - 120V	9 - 90CRI	5CT- 27K, 3K, 35K, 4K, 5K	WH - White BK - Black		